

- Step 1: Creating Project Space on Wiki
  - Advantages of wiki system
- Step 2: Background Study
- Step 3: Searching
  - Dolcera Patent Search Template
  - Building Search History
- Step 4: Analysis & Presentation
  - Analysis & Presentation
  - Marking in pdf documents
- Step 5: Reporting
- Prior Art Search Process



## Creating secure client & project space on Dolcera wiki

Space for Client Name & Logo



New secure space for new clients



For existing clients – New secure page in existing secure space

- Ensure secure handling of confidential information
- Client can check project status, progress from day 1
- Client can provide quick feedback at any point of time during execution
- Multi format data can be integrated in single wiki format
- .doc, .xls, .ppt etc type files of any size can upload/download to/from wiki system
- Avoid email traffic

## Dolcera team does the following task:

- Understand technology by background study process
  - Study source: Web search, scientific literature, wikipedia
- Identify novelty of the invention
- Identify inventive steps on the invention
- Validate internally both novelty & inventive step with vertical heads
- Publish novelty & inventive steps on wiki for client validation along with question if any

## Patent & non-patent search

- Identify keywords from
  - Client's invention
  - Background study
- Identify IPC, US, ECLA and F-Term codes from
  - Preliminary patent search
  - IPC, US, ECLA and F-Term class study



- Generating patent search template
- Building search logic & search history
- Getting validated by vertical head
- Publishing on client wiki for comments

Concepts	Keywords 1	Keywords 2	US Code	IPC	ECLA	F-Term	Assignee	Control Patent
1	Melanoma	IFN*	4240854	C07K001452	A61K003819	4H045	Abbott	US7551163B1
2	Skin NEAR3 (cancer)	*IFN	4242811	A61K003819	A61K003821	DA15	Medtronic	US7539738B2
3	carcinoma	Interferon*	42400141	A61K003821	A61K38/21A	DA16	Ranbaxy	US7539293B2
4	tumor	*interferon	514889		C07K001452	DA17	Clorox	US7530285B2
5		huIFN	930142		C07K001456	DA18	Unilever	US7537008B2

**Search date: 14 Sept, 2006**

**Database: Micropatent (PatSearch Fulltext)**


**Search Strings, Hits & Scope:**

- **Search I**
  - (Life) AND (Insurance OR Reinsurance OR Polic\* OR Annuit\*) - 532 hits
  - Search scope – Title, Abstract & Claims, Date - 2000 till date
  - Databases: US, EP, WO, JP, DE, GB and FR (common for all)
- **Search II**
  - (computer) and (Insurance OR Reinsurance) and (Polic\* OR Annuit\*) – 511 hits
  - Search scope – Title, Abstract & Claims, Date 1991 till date
- **Search III**
  - (Insurance OR Reinsurance OR polic\* or Annuit\*) limited by assignee (Insurance OR Bank) – 345 hits
  - Search scope – Title, Abstract & Claims, Date – 1991 till date – 345 hits

**Total # of records - Search I + Search II + Search III = 1239 (excluding duplicates and family members but includes off-target)**

**Note: All search hits exclude family members and duplicate patent records**

# Creating taxonomy

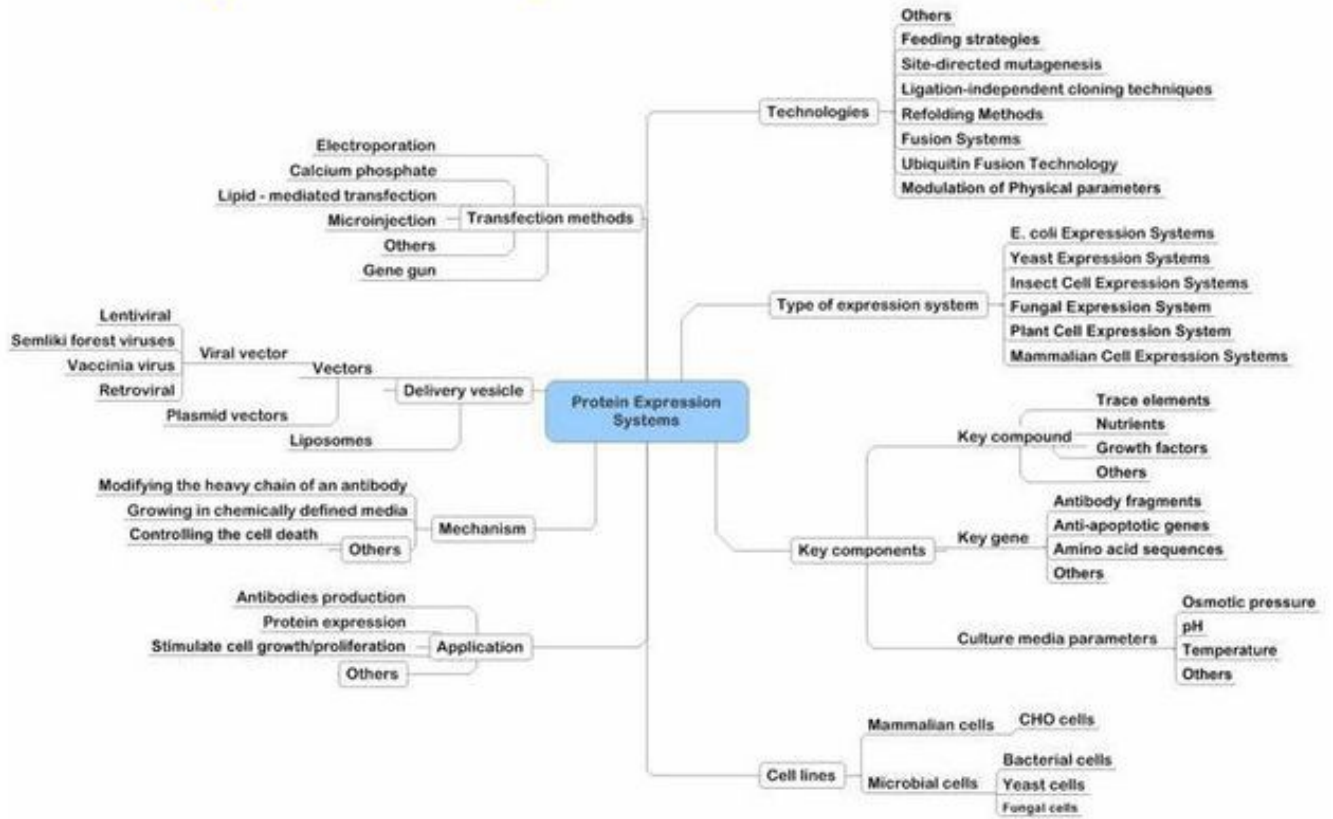



# Creating IP maps

Home | All Workfiles | All T... | Mohammed Abdul Jaleel (M)ABDUL

**Mouseover displaying original claim elements**

IPMap

Patent/Assignee	Door type ?	Opening/closing mechanism ?	Protective device - ?	Movement of cover ?	Fixing of cover ?	Position of cover ?	Prevent trapping or crushing ?
<p><b>US3754786</b> Hedstrom Company</p>	Playseat	<p>Tilting or pivoting door (200) which comprises as partial elements a frame (1), a door panel (2) which is held therein so as to be pivotable or tiltable and particularly movable overhead.</p>	Guard	N/A	Pivoted	Secured between the legs at each pivotal connection	Protect fingers from pinch points
<p><b>US6053693</b> Crow River Industries, Inc.,</p>	Lifting wheelchair	Lever arm mechanism	Slide shoe - Not a protective device	Slide shoe slides on lower pivot arm towards vertical channel beam intermediate pivot shaft	Catch pin fitting in slot retains slide shoe	Pivotly connected to link arms 100A and 100B	N/A
<p><b>US6029585</b> Osaka Taiyu Co., Ltd.</p>	Lift mechanism	Lever arm mechanism	Safety cover	Safety cover of lever mechanism moves closer to base in course of movement of table along a verticle axis.	Pivoted to intermediate bracket	Attached to an intermediate bracket	N/A
<p><b>US3799375</b> Peabody Galion Corporation</p>	Tailgate of ref vehicle					Pivotally mounted at its ends in a pair of levers	Prevents inserting of hand or arm in danger location adjacent the sill Cranking of


**Download pdf for review with relevant portion marked**

**Taxonomy for claim elements to be invalidated**

**Analyzed information in tabular format for quick comparison with technical detail taxonomy to be invalidated**

**Mouseover displaying bibliographic and image information to be invalidated**

## Our pdf marking process indicate our analysis strength & save client's time

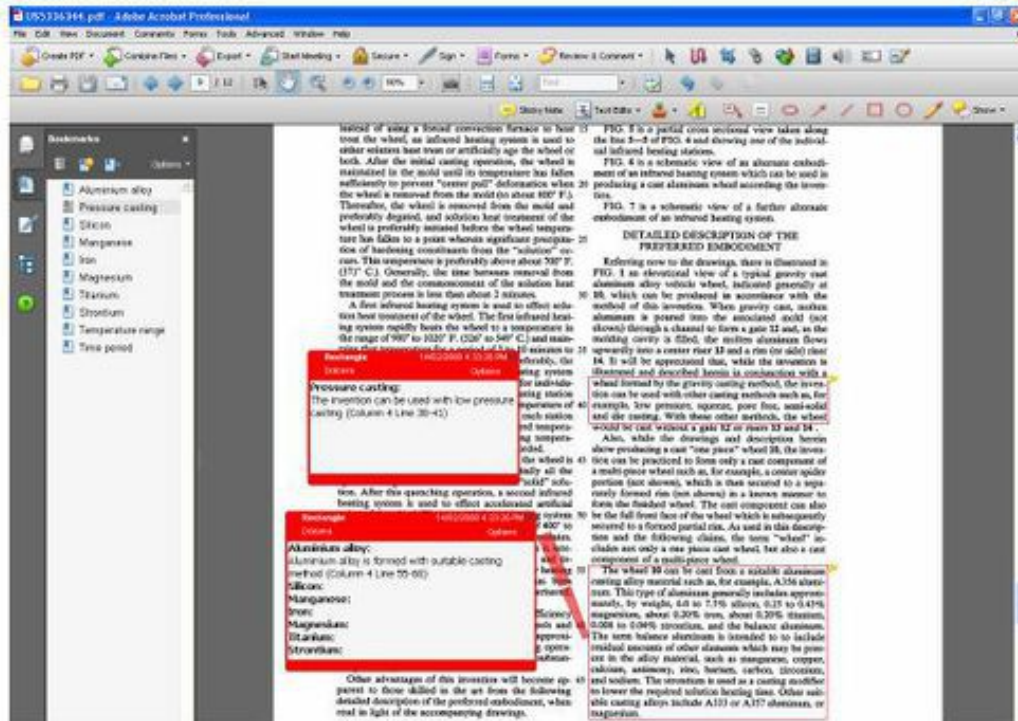


# Final report format for prior art search

	
<b>US Office</b> 101 A South Delaware St. #506 San Mateo, CA 94401 Phone: +1-650-209-7852 info@dolcera.com <a href="http://www.dolcera.com">www.dolcera.com</a>	<b>India Office</b> 8-1-5555/11 (B/L); 507, Road #12, Bagga Hills, Hyderabad, India Phone: +91-40-23399810
<b>Search report</b>	
August 01, 2007	
Patent Engineer: Receive date:	
<b>Title:</b> Guiding system	
<b>Search criteria:</b> 1. Positioning of power system 2. Guided mode 3. Vehicle positioning system	
Very Relevant Document (* indicates a XYZ patent/application)	Relevant to criteria
<b>US5758583 -</b> <ul style="list-style-type: none"> <li>• Power steering mechanism is connected to central pivot (which is on the side) which actuates simultaneously, through a quadrant, a left-wheel control rod and a right-wheel control rod (Page 3 Line 45-47 &amp; Fig. 7)</li> <li>• Self-guided mode (Page 2 Line 5-6)</li> </ul>	
Relevant Document (* indicates a Philips patent/application)	Relevant to criteria
<b>EP1324891-</b> <ul style="list-style-type: none"> <li>• Steering <del>arrangement</del> provides steering of the wheels with tires (Para 0020 &amp; Fig 3)</li> <li>• Automatically guided vehicle (Para 0015)</li> </ul>	
Technical background (* indicates a xyz patent/application)	Relevant to criteria
<b>US5540298 -</b> <ul style="list-style-type: none"> <li>• Power steering is provided on the rod to steer left and right (front) wheels (Page 12 Line 15-19)</li> </ul>	



## Prior Art Search – Novelty

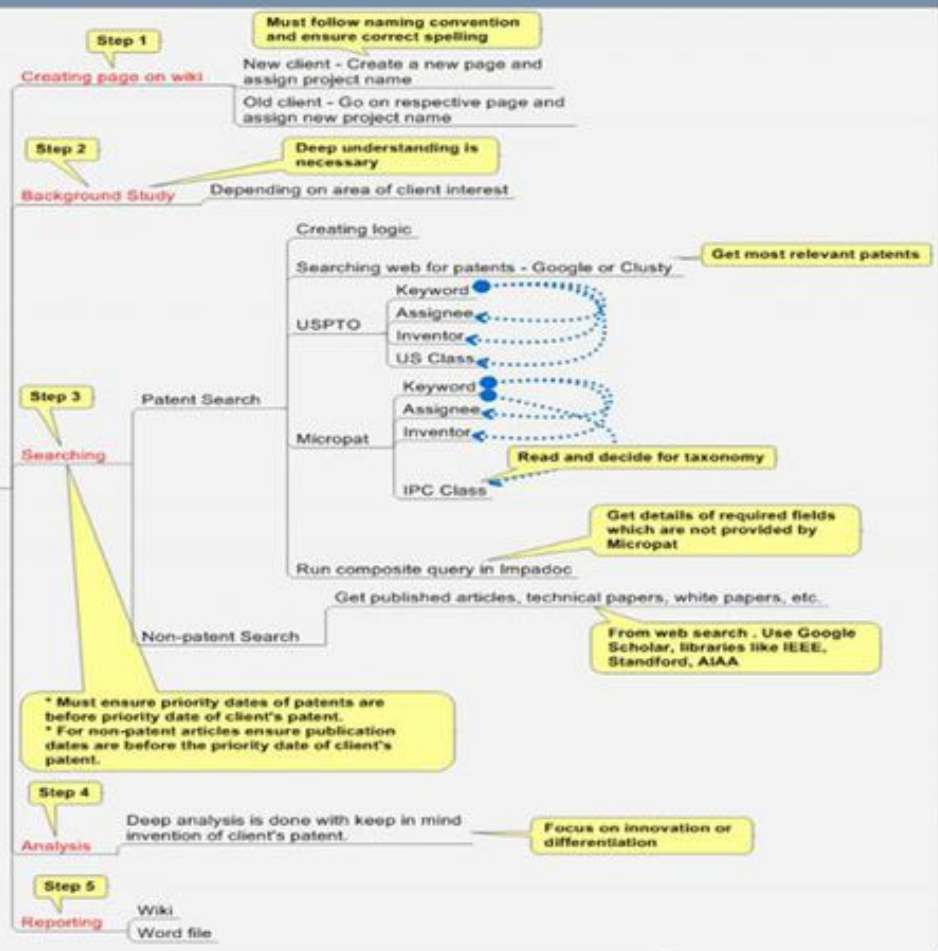

- Notes:**
1. Focus on differentiation or Innovation
  2. Document all search string
  3. Do not delete any records (even if off-target)



### Invalidation Procedure:

- We take the Examination search report from the EP register or from US pair to see if the patents cited by the examiner are cited as X or Y attack
- **X-attack:** A single document is used to invalidate each and every independent claim of a patent.
- **Y-attack:** Multiple/combination of documents are used to invalidate each and every independent claim of a patent.
- Class search is performed using ECLA, US Class, F-term(Japanese Patent search) and IPC.
- Search strategy is built using the classes and Keywords.
- Search is done using various databases like Micropat, Q-pat, SIP.
- The retrieved patents are analyzed keeping in view the independent claim elements of the invalidating patent and represented according to relevancy i.e High ,Low or medium relevancy

- A claim comparison chart is prepared using patents cited by the examiner with that of the Invalidating patent and elements from the Independent claim of the patent to be invalidated. These patents guide us for further invalidating the patent and also gives us the idea of which elements from the X OR Y attack are not present in the cited patents.
- The Independent claim comparison chart is as follows. (X- Represent elements are present in the patent)

S.No.	Patent/Publication No.	Precipitated Silica	BET surface area(m <sup>2</sup> /g)	CTAB surface area(m <sup>2</sup> /g)	Alumina	Water glass (Sodium silicate)	Sulfuric acid	Temperature range	pH range
1	<a href="#">EP983966A1</a>	X	80-180 m <sup>2</sup> /g	80-139 m <sup>2</sup> /g	<5%	X	X	60-95°C	3.98
2	<a href="#">US5800609</a>	X	140-200 m <sup>2</sup> /g	140-200 m <sup>2</sup> /g	0.35-1.50% by weight	X	X	70-98°C	3 and a 6.5
3	<a href="#">WO/2002/051749</a>	X	110-260 m <sup>2</sup> /g	100-250 m <sup>2</sup> /g	0.3% by weight	X	X	90-95°C	5.2

